



High Performance, High Speed, Impactable Door Systems for Parking Garage Applications




Tough 'n' Ready
For Your Challenging
Environments

LOW HEADROOM PARKING DOOR SYSTEMS

Applications: Condos, office towers, hotels, underground parking, airports

PARK-KING™ doors combine rugged durability with a high performance drive system and sophisticated controls for superior low & extra low headroom parking garage door solutions.

Outstanding reliability, minimal downtime and fast operation are essential requirements of parking garage door applications. Property and Maintenance Managers recognize the value of our PARK-KING doors proven durability and reliability combined with high speed performance and low maintenance.

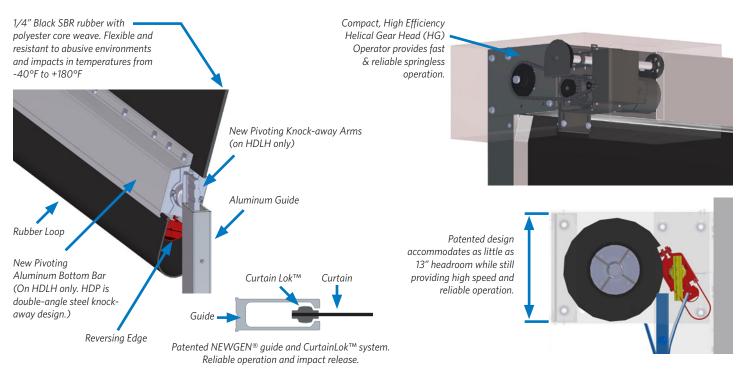

PARK-KING™ Door Features	model HDP low headroom	model HDLH extra low headroom
Door Size — Maximum width x height – feet	25 x 10	25 x 10
Headroom Clearance — Minimum - inches	18	13
Opening Speed — inches per second (up to)	30	30
Springless Design — With optional inertia brake	•	•
Curtain Type — 1/4" Black SBR rubber with polyester core weave	•	•
Static Windload — 20 pounds per square foot	•	•
Traveling Windbar — for windy applications (optional)	•	n/a - optional weight for 15 lb/ft bottom bar
Reversing Edge — Pressure sensitive, wireless	Air-wave edge	2-wire electric edge
Control Panel — PLC and Inverter Drive soft start, soft stop	•	•
Activation — Remote controls, pull cords, loop & motion detectors and more	•	•
Frame — self-supporting Steel Mounting Angle	•	•
Photoeyes — Through Beam standard	•	•
Egress — Emergency Chain Hoist	•	•
Other Options — curtain colors, windows, hoods, access controls, speciality functions, sequencing, traffic lights and more	•	•

Warranty: Limited lifetime warranty on curtain and NEWGEN® Guide. Two years on helical gear head operator and all other parts and workmanship.



Toll-free 1-866-792-9968 Fax 1-705-735-9564 info@tnrdoors.com TNRdoors.com